



EoL

END OF LINE

## 3600C COMPACT CASE PACKER



### Compact, efficient case packer

The 3600-C provides world-class case packing for tissue and nonwoven industries at a rate of up to 15 cases per minute in a compact footprint. The flexibility of handling a variety of case sizes allows you to use one fully integrated machine for all products. Changeover adjustments are available in manual, air or servo.

The robust machine design features ergonomic access points for quick handling and an easy to use HMI. Early minor flap tucking provides stability and control for ease of transfer and less product jams.

#### FEATURES AND BENEFITS

- Optional servo controlled product changeovers to minimize production downtime
- Designed to accommodate the largest range of case sizes on a single machine
- Ergonomic access to clean and maintain the machine
- Optional RFID change parts to minimize operator errors reducing production downtime
- Simple and operator friendly color touchscreen interface
- Company footprint allows for streamlined integration into existing lines with limited space
- Specializing in "away from home" products

## TYPICAL PRODUCT SPECIFICATIONS

<b>Speed</b>	Up to 15 cases per minute
<b>Changeover Time:</b>	Under 15-minutes if servo-driven.
<b>Applications:</b>	Specializing in "away from home" tissue and non-woven products
<b>Case Types:</b>	RSC and HSC
<b>Case Length:</b>	12" - 28"
<b>Case Width:</b>	8" - 24"

<b>Case Depth</b>	7 1/2" - 24"
<b>Case Range</b>	Knocked down length: 18 1/4" - 44 1/4" Knocked down width: 13" - 42"
<b>Case Sealing</b>	Hot melt glue, tape and cold glue options
<b>HMI</b>	10" Allen-Bradley color touchscreen
<b>Electrical</b>	NEMA 12
<b>Air Requirements</b>	80 PSI

## PRODUCT OPERATION

### A. PACKER

Product is correlated and lifted up to the case for packing.

### B. MAGAZINE

One KDF is separated from the stack.

### C. CASE FORMER

The case is formed.

### D. CASE LOADING AND FLAP TUCKING STATION


Case is loaded with the product and minor flaps are closed.

### E. SEALING STATION

Glue is applied to the case and compressed for sealing.

### F. AUXILLARY MAGAZINE

Separate 1 KDF from the stack by a servo gantry pick and load dropping them into the magazine.

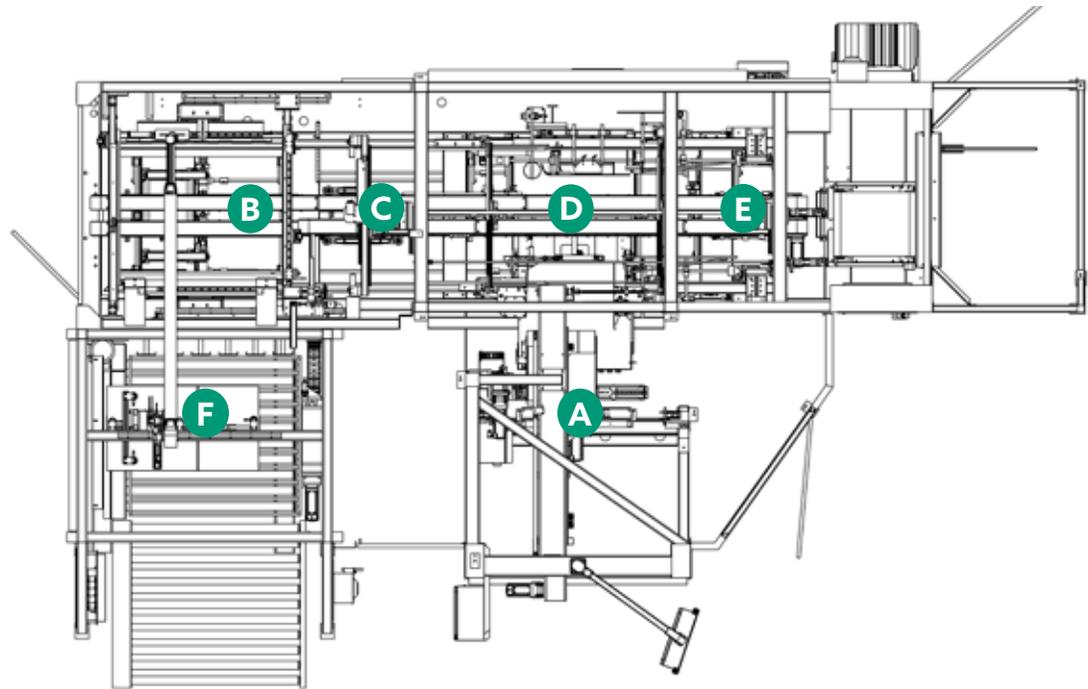

Your packaging line should be simple to use.  
That's why our equipment uses the latest technology.



©2018 ProMach Inc. ProMach reserves the right to change or discontinue specifications and designs shown in this brochure without notice or recourse  
PM-ED-SP100\_Edson\_3600-C Spec\_09-04-19